




Guias lineares

BGX & BGC SERIES (H-B)

© BL : BGX → J1 ; BGC → J

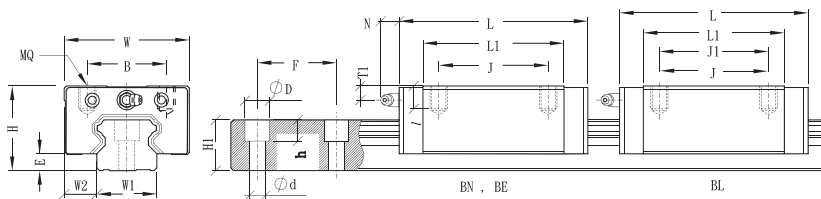

Model	Assembly-mm				Block-mm										Rail-mm						Rating load-kN			Static moment - kN-m			Block	Rail
	H	W	W2	E	L	B	J	J1	MQ	I	L1	Oil H	T1	N	W1	H1	F	d	D	h	C-BGX	C-BGC	C0	M _x	M _y	M _z		
H15BN	28	34	9.5	3.3	58.6	26	26		M4	6.0	40.2	M4X0.7	9.5	(5)	15	13.0	60	4.5	7.5	6.0	9.3	11.5	19.6	0.136	0.117	0.117	0.19	1.28
H20BN	30	44	12.0	4.5	69.3	32	36		M5	6.5	48.5	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	14.3	17.7	30.5	0.285	0.220	0.220	0.31	2.15
H20BL	30	44	12.0	4.5	82.1	32	36	50	M5	6.5	61.3	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	18.6	23.0	39.5	0.369	0.361	0.361	0.36	2.15
H20BE	30	44	12.0	4.5	97.3	32	50		M5	6.5	76.5	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	22.1	27.3	48.9	0.456	0.557	0.557	0.47	2.15
H25BN	40	48	12.5	5.8	79.2	35	35		M6	9.0	57.5	M6X1	14.2	(15.6)	23	19.2	60	7.0	11.0	9.0	20.1	24.8	41.1	0.440	0.352	0.352	0.45	2.88
H25BL	40	48	12.5	5.8	93.9	35	35	50	M6	9.0	72.2	M6X1	14.2	(15.6)	23	19.2	60	7.0	11.0	9.0	25.9	31.9	52.8	0.566	0.568	0.568	0.66	2.88
H25BE	40	48	12.5	5.8	108.6	35	50		M6	9.0	86.9	M6X1	14.2	(15.6)	23	19.2	60	7.0	11.0	9.0	29.2	36.0	63.3	0.679	0.819	0.819	0.80	2.88
H30BN	45	60	16.0	7.0	94.8	40	40		M8	12.0	67.8	M6X1	13	(15.6)	28	22.8	80	9.0	14.0	12.0	29.7	36.7	54.6	0.706	0.551	0.551	0.91	4.45
H30BL	45	60	16.0	7.0	105.0	40	40	60	M8	12.0	78.0	M6X1	13	(15.6)	28	22.8	80	9.0	14.0	12.0	38.5	47.5	70.7	0.915	0.821	0.821	1.04	4.45
H30BE	45	60	16.0	7.0	130.5	40	60		M8	12.0	103.5	M6X1	13	(15.6)	28	22.8	80	9.0	14.0	12.0	42.9	52.9	86.7	1.122	1.336	1.336	1.36	4.45
H35BN	55	70	18.0	7.5	111.5	50	50		M8	12.0	80.5	M6X1	18.5	(15.6)	34	26.0	80	9.0	14.0	12.0	42.4	52.3	81.1	1.282	0.972	0.972	1.50	6.25
H35BL	55	70	18.0	7.5	123.5	50	50	72	M8	12.0	92.5	M6X1	18.5	(15.6)	34	26.0	80	9.0	14.0	12.0	52.9	65.4	101.4	1.602	1.396	1.396	1.80	6.25
H35BE	55	70	18.0	7.5	153.5	50	72		M8	12.0	122.5	M6X1	18.5	(15.6)	34	26.0	80	9.0	14.0	12.0	58.3	71.9	125.3	1.981	2.286	2.286	2.34	6.25
H45BN	70	86	20.5	8.9	129.0	60	60		M10	18.0	94.0	M8X1.25	24.4	(16)	45	31.1	105	14.0	20.0	17.0	58.0	71.6	108.9	2.300	1.524	1.524	2.28	9.60
H45BL	70	86	20.5	8.9	145.0	60	60	80	M10	18.0	110.0	M8X1.25	24.4	(16)	45	31.1	105	14.0	20.0	17.0	69.0	85.1	129.5	2.736	2.122	2.122	2.67	9.60
H45BE	70	86	20.5	8.9	174.0	60	80		M10	18.0	139.0	M8X1.25	24.4	(16)	45	31.1	105	14.0	20.0	17.0	79.7	98.4	163.3	3.449	3.379	3.379	3.35	9.60
H55BN	80	100	23.5	12.7	155.0	75	75		M12	22.0	116.0	M8X1.25	24.0	(16)	53	38.0	120	16.0	23.0	20.0	69.8	86.2	133.4	3.303	2.304	2.304	3.42	13.80
H55BL	80	100	23.5	12.7	193.0	75	75	95	M12	22.0	154.0	M8X1.25	24.0	(16)	53	38.0	120	16.0	23.0	20.0	94.2	116.3	178.9	4.428	4.101	4.101	4.57	13.80
H55BE	80	100	23.5	12.7	210.0	75	95		M12	22.0	171.0	M8X1.25	24.0	(16)	53	38.0	120	16.0	23.0	20.0	127.7	157.7	253.6	6.279	6.458	6.458	5.08	13.80



- Equal load capacities in four directions
- High rigidity 4-row angular contact
- Integral all-round double sealing



- High seppd-low noises
- Interchangeability
- No ball drop



Only 1/6-1/10 Fluctuation range for cage block



- Cage & Non-cage blocks on the same profile rail



Accuracy Standard


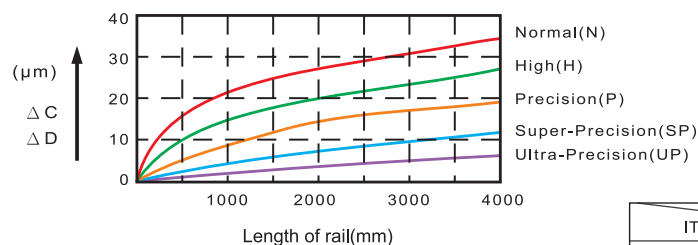


Fig. 1-1 BG rail length and running parallelism

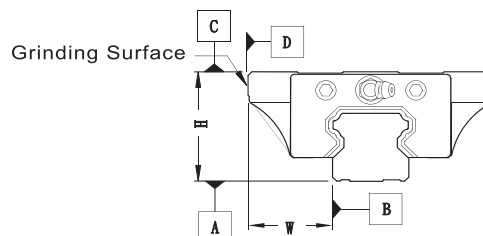

ITEM	GRADE				
	Normal(N)	High(H)	Precision(P)	Super-Precision (SP)	Ultra-Precision (UP)
Tolerance of height (H)	±0.1	±0.04	0 -0.04	0 -0.02	0 -0.01
Tolerance of width (W)	±0.1	±0.04	0 -0.04	0 -0.02	0 -0.01
Difference of heights (ΔH)	0.03	0.02	0.01	0.005	0.003
Difference of widths (ΔW)	0.03	0.02	0.01	0.005	0.003
Running parallelism of BG Block surface [C] with respect to surface [A]	ΔC Refer to Fig. 1-1				
Running parallelism of BR Block surface [D] with respect to surface [B]	ΔD Refer to Fig. 1-1				

Unit : mm


High accuracy

Low oise

Low friction


Low vibration

BGX & BGC SERIES (S-B)

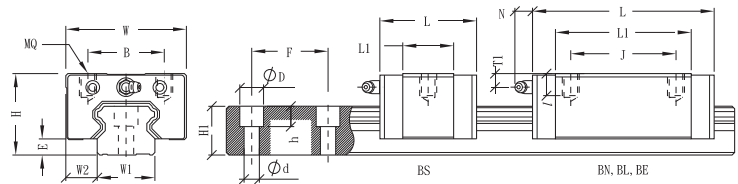


Model	Assembly-mm				Block-mm										Rail-mm								Rating load-kN			Static moment - kN-m			Block	Rail
	H	W	W2	E	L	B	J	MQ	I	L1	Oil H	T1	N	W1	H1	F	d	D	h	C-BGX	C-BGC	C0	M _x	M _y	M _z	kg	kg/m			
S15BS	24	34	9.5	3.3	40.6	26		M4	4.8	22.2	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	4.6	5.7	9.8	0.068	0.032	0.032	0.10	1.28			
S15BN	24	34	9.5	3.3	58.6	26	26	M4	4.8	40.2	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	9.3	11.5	19.6	0.136	0.117	0.117	0.17	1.28			
S15BL	24	34	9.5	3.3	66.1	26	26	M4	4.8	47.7	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	11.3	13.9	23.7	0.164	0.169	0.169	0.18	1.28			
S15BE	24	34	9.5	3.3	81.1	26	34	M4	4.8	62.7	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	13.7	16.9	31.4	0.217	0.293	0.293	0.22	1.28			
S20BS	28	42	11.0	4.5	48.3	32		M5	5.5	27.5	M6X1	5.1	(15.6)	20	16.3	60	6.0	9.5	8.5	7.4	9.1	15.7	0.146	0.064	0.064	0.17	2.15			
S20BN	28	42	11.0	4.5	69.3	32	32	M5	5.5	48.5	M6X1	5.1	(15.6)	20	16.3	60	6.0	9.5	8.5	14.3	17.7	30.5	0.285	0.220	0.220	0.26	2.15			
S25BS	33	48	12.5	5.8	54.0	35		M6	6.8	32.3	M6X1	7.2	(15.6)	23	19.2	60	7.0	11.0	9.0	10.3	12.7	21.0	0.225	0.101	0.101	0.21	2.88			
S25BN	33	48	12.5	5.8	79.2	35	35	M6	6.8	57.5	M6X1	7.2	(15.6)	23	19.2	60	7.0	11.0	9.0	20.1	24.8	41.1	0.440	0.352	0.352	0.38	2.88			
X25BN	36	48	12.5	5.8	79.2	35	35	M6	9.0	57.5	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	20.1	24.8	41.1	0.440	0.352	0.352	0.40	2.88			
X25BL	36	48	12.5	5.8	93.9	35	35	M6	9.0	72.2	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	25.9	31.9	52.8	0.566	0.568	0.568	0.54	2.88			
X25BE	36	48	12.5	5.8	108.6	35	50	M6	9.0	86.9	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	29.2	36.0	63.3	0.679	0.819	0.819	0.67	2.88			
S30BS	42	60	16.0	7.0	64.2	40		M8	10.0	37.2	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	14.7	18.2	27.0	0.350	0.150	0.150	0.50	4.45			
S30BN	42	60	16.0	7.0	94.8	40	40	M8	10.0	67.8	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	29.7	36.7	54.6	0.706	0.551	0.551	0.80	4.45			
S30BL	42	60	16.0	7.0	105.0	40	40	M8	10.0	78.0	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	38.5	47.5	70.7	0.915	0.821	0.821	0.94	4.45			
S30BE	42	60	16.0	7.0	130.5	40	60	M8	10.0	103.5	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	42.9	52.9	86.7	1.122	1.336	1.336	1.16	4.45			
S35BS	48	70	18.0	7.5	75.5	50		M8	10.0	44.5	M6X1	11.5	(15.6)	34	26.0	80	9.0	14.0	12.0	21.2	26.2	40.7	0.643	0.269	0.269	0.80	6.25			
S35BN	48	70	18.0	7.5	111.5	50	50	M8	10.0	80.5	M6X1	11.5	(15.6)	34	26.0	80	9.0	14.0	12.0	42.4	52.3	81.1	1.282	0.972	0.972	1.20	6.25			
S35BL	48	70	18.0	7.5	123.5	50	50	M8	10.0	92.5	M6X1	11.5	(15.6)	34	26.0	80	9.0	14.0	12.0	52.9	65.4	101.4	1.602	1.396	1.396	1.40	6.25			
S35BE	48	70	18.0	7.5	153.5	50	72	M8	10.0	122.5	M6X1	11.5	(15.6)	34	26.0	80	9.0	14.0	12.0	58.3	71.9	125.3	1.981	2.286	2.286	1.84	6.25			
S45BN	60	86	20.5	8.9	129.0	60	60	M10	15.5	94.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	58.0	71.6	108.9	2.300	1.524	1.524	1.64	9.60			
S45BL	60	86	20.5	8.9	145.0	60	60	M10	15.5	110.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	69.0	85.1	129.5	2.736	2.122	2.122	1.93	9.60			
S45BE	60	86	20.5	8.9	174.0	60	80	M10	15.5	139.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	79.7	98.4	163.3	3.449	3.379	3.379	2.42	9.60			
S55BN	70	100	23.5	12.7	155.0	75	75	M12	18.0	116.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	69.8	86.2	133.4	3.303	2.304	2.304	2.67	13.80			
S55BL	70	100	23.5	12.7	193.0	75	75	M12	18.0	154.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	94.2	116.3	178.9	4.428	4.101	4.101	3.57	13.80			
S55BE	70	100	23.5	12.7	210.0	75	95	M12	18.0	171.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	127.7	157.7	253.6	6.279	6.458	6.458	3.97	13.80			

BGX & BGC SERIES (H-F) (S-F)

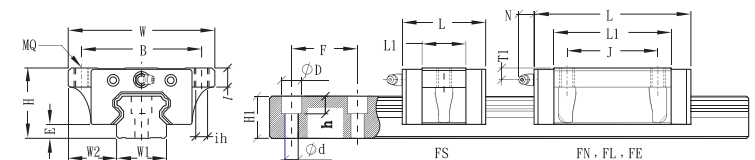

© PLEASE CONTACT OME/ STAF FOR MORE INFORMATION.

	Model	Assembly-mm				Block-mm										Rail-mm								Rating load-kN			Static moment - kN-m			Block	Rail
		H	W	W2	E	L	B	J	MQ	ih	I	L1	Oil H	T1	N	W1	H1	F	d	D	h	C-BGX	C-BGC	C0	M _x	M _y	M _z	kg	kg/m		
◎	H15FN	24	47	16.0	3.3	58.6	38	30	M5	4.4	8.0	40.2	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	9.3	11.5	19.6	0.136	0.117	0.117	0.21	1.28		
	H15FL	24	47	16.0	3.3	66.1	38	30	M5	4.4	8.0	47.7	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	11.3	13.9	23.7	0.164	0.169	0.169	0.23	1.28		
	H15FE	24	47	16.0	3.3	81.1	38	30	M5	4.4	8.0	62.7	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	13.7	16.9	31.4	0.217	0.293	0.293	0.29	1.28		
	S15FS	24	52	18.5	3.3	40.6	41		M5	4.4	8.0	22.2	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	4.6	5.7	9.8	0.068	0.032	0.032	0.12	1.28		
	S15FN	24	52	18.5	3.3	58.6	41	26	M5	4.4	8.0	40.2	M4X0.7	5.5	(5)	15	13.0	60	4.5	7.5	6.0	9.3	11.5	19.6	0.136	0.117	0.117	0.19	1.28		
◎	H20FN	30	63	21.5	4.5	69.3	53	40	M6	5.4	9.0	48.5	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	14.3	17.7	30.5	0.285	0.220	0.220	0.40	2.15		
	H20FL	30	63	21.5	4.5	82.1	53	40	M6	5.4	9.0	61.3	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	18.6	23.0	39.5	0.369	0.361	0.361	0.46	2.15		
	H20FE	30	63	21.5	4.5	97.3	53	40	M6	5.4	9.0	76.5	M6X1	7.1	(15.6)	20	16.3	60	6.0	9.5	8.5	22.1	27.3	48.9	0.456	0.557	0.557	0.61	2.15		
	S20FS	28	59	19.5	4.5	48.3	49		M6	5.4	7.0	27.5	M6X1	5.1	(15.6)	20	16.3	60	6.0	9.5	8.5	7.4	9.1	15.7	0.225	0.101	0.101	0.18	2.15		
	S20FN	28	59	19.5	4.5	69.3	49	32	M6	5.4	7.0	48.5	M6X1	5.1	(15.6)	20	16.3	60	6.0	9.5	8.5	14.3	17.7	30.5	0.285	0.220	0.220	0.31	2.15		
◎	H25FN	36	70	23.5	5.8	79.2	57	45	M8	7.0	10.0	57.5	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	20.1	24.8	41.1	0.440	0.352	0.352	0.57	2.88		
	H25FL	36	70	23.5	5.8	93.9	57	45	M8	7.0	10.0	72.2	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	25.9	31.9	52.8	0.566	0.568	0.568	0.72	2.88		
	H25FE	36	70	23.5	5.8	108.6	57	45	M8	7.0	10.0	86.9	M6X1	10.2	(15.6)	23	19.2	60	7.0	11.0	9.0	29.2	36.0	63.3	0.679	0.819	0.819	0.89	2.88		
	S25FS	33	73	25.0	5.8	54.0	60		M8	7.0	7.0	32.3	M6X1	7.2	(15.6)	23	19.2	60	7.0	11.0	9.0	10.3	12.7	21.0	0.225	0.101	0.101	0.33	2.88		
	S25FN	33	73	25.0	5.8	79.2	60	35	M8	7.0	7.0	57.5	M6X1	7.2	(15.6)	23	19.2	60	7.0	11.0	9.0	20.1	24.8	41.1	0.440	0.352	0.352	0.50	2.88		
◎	H30FS	42	90	31.0	7.0	64.2	72		M10	8.6	11.0	37.2	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	14.7	18.2	27.0	0.350	0.150	0.150	0.80	4.45		
	H30FN	42	90	31.0	7.0	94.8	72	52	M10	8.6	11.0	67.8	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	29.7	36.7	54.6	0.706	0.551	0.551	1.10	4.45		
	H30FL	42	90	31.0	7.0	105.0	72	52	M10	8.6	11.0	78.0	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	38.5	47.5	70.7	0.915	0.821	0.821	1.34	4.45		
	H30FE	42	90	31.0	7.0	130.5	72	52	M10	8.6	11.0	103.5	M6X1	10	(15.6)	28	22.8	80	9.0	14.0	12.0	42.9	52.9	86.7	1.122	1.336	1.336	1.66	4.45		
	H35FS	48	100	33.0	7.5	75.5	82		M10	8.6	12.0	44.5	M6X1	11.5	(16)	34	26.0	80	9.0	14.0	12.0	21.2	26.2	40.7	0.643	0.269	0.269	1.00	6.25		
◎	H35FN	48	100	33.0	7.5	111.5	82	62	M10	8.6	12.0	80.5	M6X1	11.5	(16)	34	26.0	80	9.0	14.0	12.0	42.4	52.3	81.1	1.282	0.972	0.972	1.50	6.25		
	H35FL	48	100	33.0	7.5	123.5	82	62	M10	8.6	12.0	92.5	M6X1	11.5	(16)	34	26.0	80	9.0	14.0	12.0	52.9	65.4	101.4	1.602	1.396	1.396	1.90	6.25		
	H35FE	48	100	33.0	7.5	153.5	82	62	M10	8.6	12.0	122.5	M6X1	11.5	(16)	34	26.0	80	9.0	14.0	12.0	58.3	71.9	125.3	1.981	2.286	2.286	2.54	6.25		
	H45FN	60	120	37.5	8.9	129.0	100	80	M12	10.6	15.5	94.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	58.0	71.6	108.9	2.300	1.524	1.524	2.27	9.60		
	H45FL	60	120	37.5	8.9	145.0	100	80	M12	10.6	15.5	110.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	69.0	85.1	129.5	2.736	2.122	2.122	2.68	9.60		
	H45FE	60	120	37.5	8.9	174.0	100	80	M12	10.6	15.5	139.0	M8X1.25	14.4	(16)	45	31.1	105	14.0	20.0	17.0	79.7	98.4	163.3	3.449	3.379	3.379	3.42	9.60		
	H55FN	70	140	43.5	12.7	155.0	116	95	M14	12.6	18.5	116.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	69.8	86.2	133.4	3.303	3.304	2.304	3.44	13.80		
	H55FL	70	140	43.5	12.7	193.0	116	95	M14	12.6	18.5	154.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	94.2	116.3	178.9	4.428	4.101	4.101	4.63	13.80		
	H55FE	70	140	43.5	12.7	210.0	116	95	M14	12.6	18.5	171.0	M8X1.25	14.0	(16)	53	38.0	120	16.0	23.0	20.0	127.7	157.7	253.6	6.279	6.458	6.458	5.16	13.80		


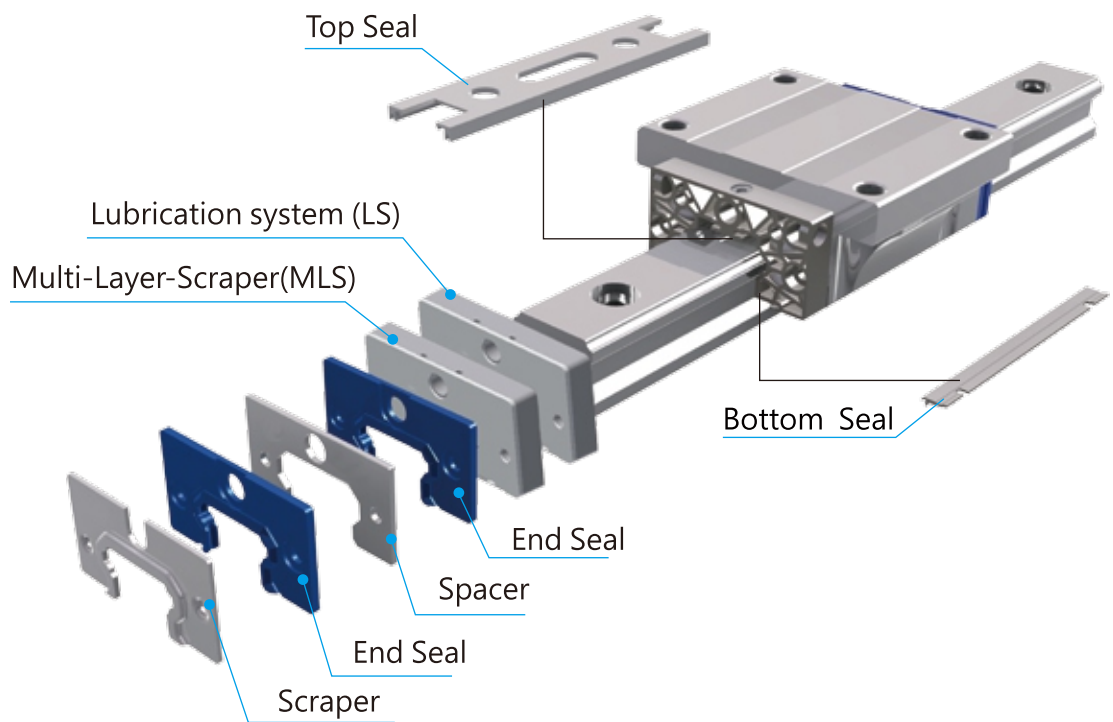


Standard Seals	LFS	RSS	LS	Additional
----------------	-----	-----	----	------------

Standard Seals		Low Friction Seals (LFS)		Reinforced Side Seals (RSS)	
Code	Explain	Code	Explain	Code	Explain
--	End Seal + Side Seal	AL	LFS + Side Seal	AB	End Seal + RSS
UU	End Seal	UL	LFS	SB	End Seal + RSS + Inner Seal
SS	End Seal + Side Seal + Inner Seal	SL	LFS + Side Seal + Inner Seal	DB	Double Seal + RSS
DD	Double Seal + Side Seal	DL	Double LFS + Side Seal	EB	Double Seal + RSS + Inner Seal
EE	Double Seal + Side Seal + Inner Seal	EL	Double LFS + Side Seal + Inner Seal	FB	End Seal + RSS + Inner Seal + Scraper
FF	End Seal + Side Seal + Inner Seal + Scraper	FL	LFS + Side Seal + Inner Seal + Scraper	GB	Double Seal + RSS + Inner Seal + Scraper
GG	Double Seal + Side Seal + Inner Seal + Scraper	GL	Double LFS + Side Seal + Inner Seal + Scraper	ZB	End Seal + RSS + Scraper
ZZ	End Seal + Side Seal + Scraper	ZL	LFS + Side Seal + Scraper	KB	Double Seal + RSS + Scraper
KK	Double Seal + Side Seal + Scraper	KL	Double LFS + Side Seal + Scraper		

Lubrication system (LS)		Additional	
Code	Explain	Code	Explain
A	Self-Lubrication	M	Multiple Layer Scrappers

More Oil Space

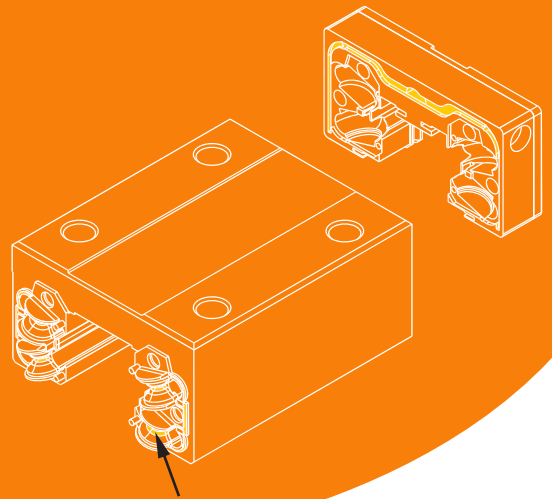

Model Number Coding

